


Screwed Tip Thermocouples : T-230


Fixing Screw Type Thermocouples for Surface Temperature Measurement : T-240

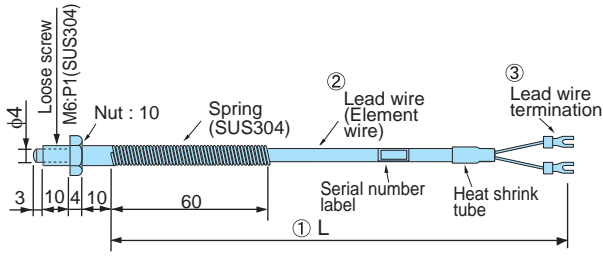

T - 230 - L - □□□ - □ - □
 ① ② ③ ④

- ① Lead wire length
- ② Lead protection
- ③ Lead wire termination
- ④ Thermocouple type

Example :T-230-2000-EXA-Y-K

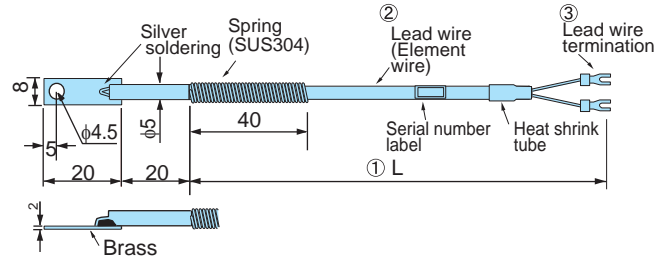

T - 240 - L - □□□ - □ - □
 ① ② ③ ④

- ① Lead wire length
- ② Lead protection
- ③ Lead wire termination
- ④ Thermocouple type

Example :T-240-2000-EXA-Y-K

①	Lead wire length	Specify length by "mm" (500mm to 10,000mm)																	
②	Lead protection	<table border="1"> <thead> <tr> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>EXA</td> <td>Element wire (Fiberglass with stainless steel) (0.3/7X2)</td> </tr> <tr> <td>EXB</td> <td>Element wire (Fiberglass) (0.3/7X2)</td> </tr> <tr> <td>EXE</td> <td>Element wire [PVC (polyvinyl chloride) with copper wire braided] (0.1/30X2)</td> </tr> </tbody> </table> <p>* EXE type is Thermocouple K only.(Protection : Black, Flat type)</p>	Code	Details	EXA	Element wire (Fiberglass with stainless steel) (0.3/7X2)	EXB	Element wire (Fiberglass) (0.3/7X2)	EXE	Element wire [PVC (polyvinyl chloride) with copper wire braided] (0.1/30X2)									
Code	Details																		
EXA	Element wire (Fiberglass with stainless steel) (0.3/7X2)																		
EXB	Element wire (Fiberglass) (0.3/7X2)																		
EXE	Element wire [PVC (polyvinyl chloride) with copper wire braided] (0.1/30X2)																		
③	Lead wire termination	<table border="1"> <thead> <tr> <th>Code</th> <th>Details</th> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>Spade lugs for JIS standard "M3" size screw</td> <td>TE*1</td> <td>Thermocouple connector (CSP01+CLP-A+CSP02)</td> </tr> <tr> <td>R</td> <td>Ring lugs for JIS standard "M4" size screw</td> <td>N</td> <td>No terminal lugs *terminal soldered</td> </tr> <tr> <td>M</td> <td>Metal connector (SCK-1602-P)</td> <td></td> <td></td> </tr> </tbody> </table> <p style="text-align: right;">*1 : Other thermocouple connector : See Page 10</p> <p style="text-align: right;">•See Page7</p>	Code	Details	Code	Details	Y	Spade lugs for JIS standard "M3" size screw	TE*1	Thermocouple connector (CSP01+CLP-A+CSP02)	R	Ring lugs for JIS standard "M4" size screw	N	No terminal lugs *terminal soldered	M	Metal connector (SCK-1602-P)			
Code	Details	Code	Details																
Y	Spade lugs for JIS standard "M3" size screw	TE*1	Thermocouple connector (CSP01+CLP-A+CSP02)																
R	Ring lugs for JIS standard "M4" size screw	N	No terminal lugs *terminal soldered																
M	Metal connector (SCK-1602-P)																		
④	Thermocouple type	<table border="1"> <thead> <tr> <th>Code</th> <th>Details</th> <th>Code</th> <th>Details</th> </tr> </thead> <tbody> <tr> <td>K</td> <td>Type K (Chromel-Alumel)</td> <td>T</td> <td>Type T (Copper-Constantan)</td> </tr> <tr> <td>J</td> <td>Type J (Iron-Constantan)</td> <td></td> <td></td> </tr> </tbody> </table>	Code	Details	Code	Details	K	Type K (Chromel-Alumel)	T	Type T (Copper-Constantan)	J	Type J (Iron-Constantan)							
Code	Details	Code	Details																
K	Type K (Chromel-Alumel)	T	Type T (Copper-Constantan)																
J	Type J (Iron-Constantan)																		
	Specifications	<p>Class : class 2 * Class 1 is available (Please specify when you order) Element : Single element Measuring junction : Grounded Maximum temperature for use</p> <table border="1"> <thead> <tr> <th>Thermocouple type</th> <th>Operating temperature for regular use</th> <th>Maximum temperature</th> </tr> </thead> <tbody> <tr> <td>K</td> <td>300°C</td> <td>400°C</td> </tr> <tr> <td>J</td> <td>300°C</td> <td>400°C</td> </tr> <tr> <td>T</td> <td>200°C</td> <td>250°C</td> </tr> </tbody> </table> <p>In case of selecting silicon cover (code:EXE), temperature range for usage change to 180°C.</p>		Thermocouple type	Operating temperature for regular use	Maximum temperature	K	300°C	400°C	J	300°C	400°C	T	200°C	250°C				
Thermocouple type	Operating temperature for regular use	Maximum temperature																	
K	300°C	400°C																	
J	300°C	400°C																	
T	200°C	250°C																	
	Reference	<p>Screw Type</p> <table border="1"> <tr> <td>Standard</td> <td>M6:P1</td> </tr> <tr> <td rowspan="2">Optional</td> <td>M8:P1.25</td> </tr> <tr> <td>W1/4</td> </tr> </table> <p>(Please specify when you order)</p>		Standard	M6:P1	Optional	M8:P1.25	W1/4											
Standard	M6:P1																		
Optional	M8:P1.25																		
	W1/4																		